


ALPOLIC® Brake Metal

SURFACE TREATMENT

ALPOLIC® Brake Metal sheets are stocked with a FEVE LUMIFLON™ finish, a fluorocarbon paint system that features a wide range of colors and glosses along with excellent durability and weathering for all your program needs. A PVDF, Kynar finish is also available as a custom request.

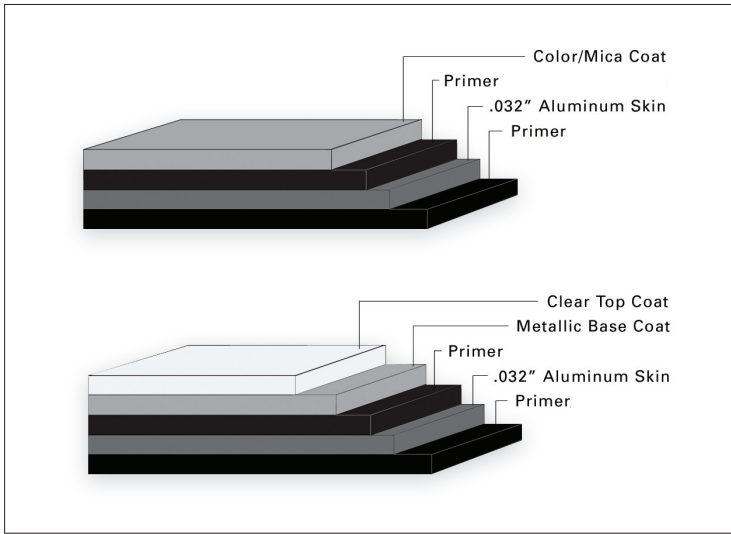

STANDARD PANEL SIZE

Standard stock sheet size is 48" (1219mm) x 120" (3048mm). Minimum order is 5 sheets. Please contact ALPOLIC® Customer Service for current available stock and additional information.

FINISH TOLERANCE

Color: DE 2.5 max from Brake Metal standard

Gloss: Nominal +/-10 units

PRODUCT TOLERANCE

Width: 48 ± 0.08 " (2mm)

Length: 120 ± 0.012 " per ft (1mm/meter)

Thickness: $0.032 \pm .00094$ " (without paint)

Squareness: maximum 0.2" (5mm)

ALPOLIC® material is trimmed and squared with cut edges to offer the best panel edge conditions in the industry.

APPLICATION

ALPOLIC® Brake Metal sheets are excellent for roof caps, flashing, fascia trim, and accents. Use in conjunction with ALPOLIC® MCM panels for optimal color consistency.

WARRANTY

No warranties are provided for the ALPOLIC Brake Metal product.

PRODUCT NOTES

- Panels should be stored flat in a dry, indoor environment.
- Sheets are provided with a protective film.
- Protective film should be removed from sheets soon after installation.
- 1000 square foot minimum required for custom color with an upcharge.
- Custom color brake metal orders follows +/- 15% order quantity fulfillment.
- ALPOLIC® MCM panels must also be ordered to produce custom color brake metal.
- Please contact Customer Service for current available stock and additional information.

FOR TECHNICAL INFORMATION,
PLEASE CALL 1.800.422.7270

ALPOLIC®
METAL COMPOSITE MATERIALS

401 Volvo Parkway, Chesapeake, VA 23320
Telephone: 800-422-7270, Fax: 757-436-1896
www.alpolic-americas.com e-mail: info@alpolic.com